





RICCIOLONE

ONE


mariosirtori

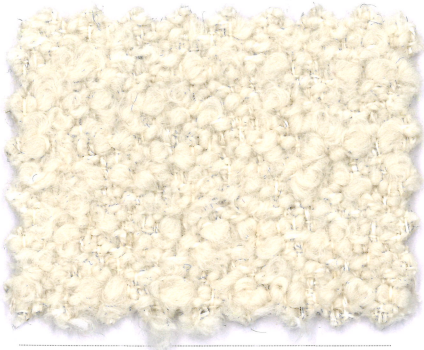

01

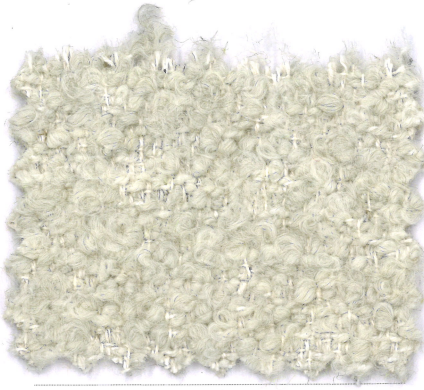


01/23

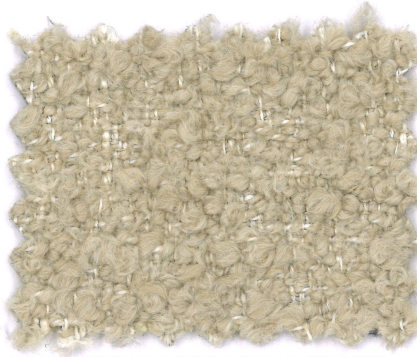


01/1



05

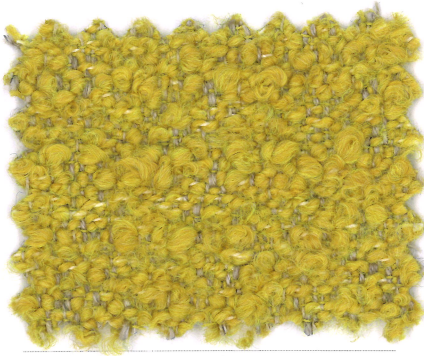

05/1

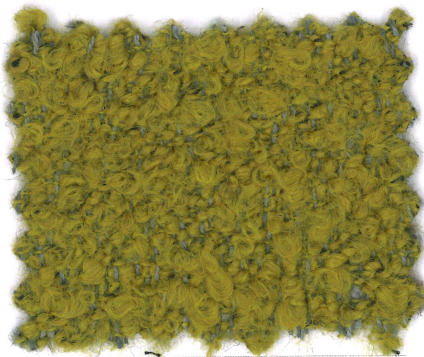


02/1



07



98/3

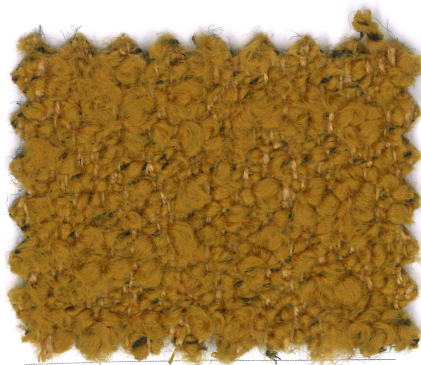

20/1



39



98/1




98



09




09/1

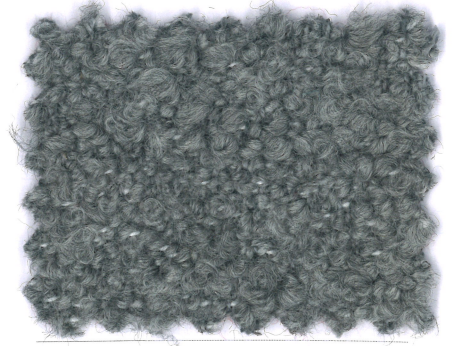


02/2




39/1

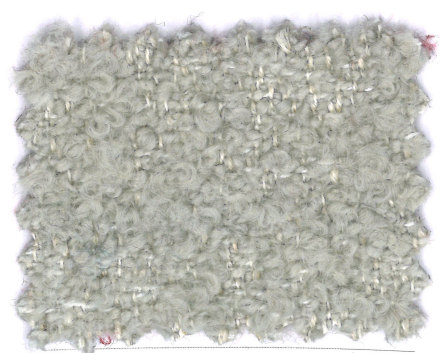


01/2

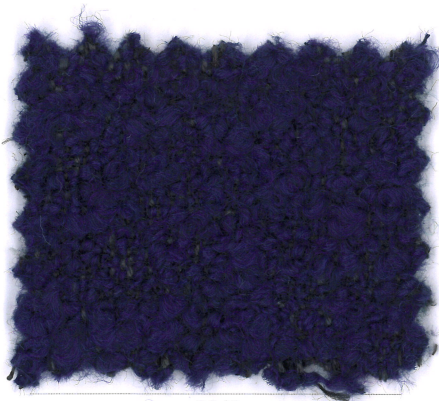


98/5

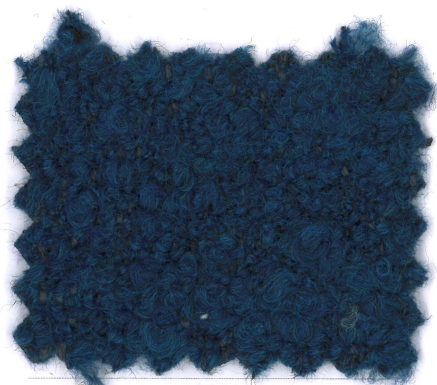

98/4

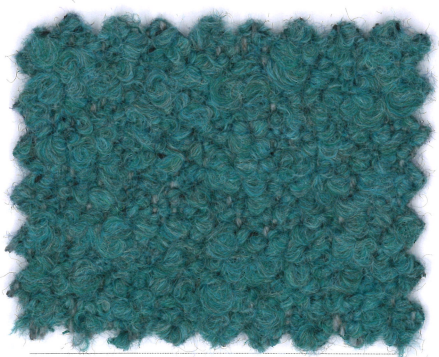


02

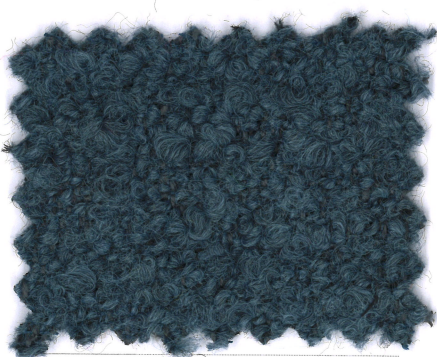

98/2



05/2

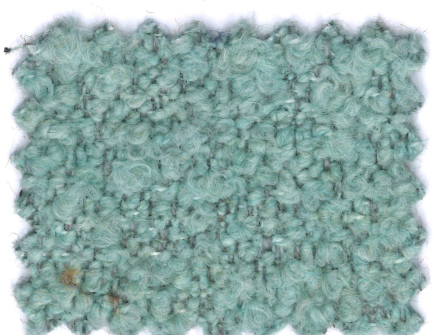

02/3

RICCIOLONE



Composizione

56%PC 15%PL 12%VI
11%CO 6%LI

Altezza

Ca. 140 cm

Peso

660 g/m² 924 g/mtl
(+/-5%)

Resistenza all'abrasione

30.000 cicli Martindale
(EN ISO 12947-2)

Pilling

4 (EN ISO 12945-2)

Ignifugazione

California TB117:2013
C&M EN 1021.1&2
C&M BS 5852 Part 0.1
NFPA 260

Solidità alla luce

5 (EN ISO 105-B02)

Solidità allo sfregamento

Umido 4; Secco 4/5
(EN ISO 105-X12)

Lavaggio

Lavaggio a secco
Seguire simboli ISO

Composition

56%PC 15%PL 12%VI
11%CO 6%LI

Width

App. 140 cm

Weight

660 g/m² 924 g/mtl
(+/-5%)

Abrasion resistance

30.000 Martindale cycles
(EN ISO 12947-2)

Pilling

4 (EN ISO 12945-2)

Flammability

California TB117:2013
C&M EN 1021.1&2
C&M BS 5852 Part 0.1
NFPA 260

Light fastness

5 (EN ISO 105-B02)

Fastness to rubbing

Wet 4; Dry 4/5
(EN ISO 105-X12)

Cleaning

Dry-cleaning
Please see the ISO symbols

Composition

56%PC 15%PL 12%VI
11%CO 6%LI

Largeur

Env. 140 cm

Poids

660 g/m² 924 g/mtl
(+/-5%)

Résistance à l'abrasion

30.000 Martindale tours
(EN ISO 12947-2)

Boulochage

4 (EN ISO 12945-2)

Flammabilité

California TB117:2013
C&M EN 1021.1&2
C&M BS 5852 Part 0.1
NFPA 260

Solidité à la lumière

5 (EN ISO 105-B02)

Solidité au frottement

Mouillé 4; Sec 4/5
(EN ISO 105-X12)

Nettoyage

Lavage à sec
Se référer aux symboles
ISO

Zusammensetzung

56%PC 15%PL 12%VI
11%CO 6%LI

Breite

Ca. 140 cm

Gewicht

660 g/m² 924 g/mtl
(+/-5%)

Scheuerfestigkeit

30.000 Martindale
Scheuertouren
(EN ISO 12947-2)

Pilling

4 (EN ISO 12945-2)

Feuersicherung

California TB117:2013
C&M EN 1021.1&2
C&M BS 5852 Part 0.1
NFPA 260

Lichtechtheit

5 (EN ISO 105-B02)

Reibechtheit

Nass 4; Trocken 4/5
(EN ISO 105-X12)

Reinigung

Trockenreinigung
Gemäß ISO Symbolen

Geman Textile G.&G. Srl

sede legale: corso XXV aprile 167/B
22036 Erba - CO
magazzino: fraz. Ceresa 1
23895 Nibionno LC
onemariosirtori.com